


# CA 6292

## 200 A digital micro-ohmmeter



- Resolution: 0.1  $\mu\Omega$
- Adjustable test current up to 200 A
- Automatic mode: 50 A, 100 A, 150 A and 200 A
- Unlimited test duration up to 100 A
- Safe measurements: Both Sides Grounded method (BSG mode)
- Internal cooling system
- Storage of up to 8,000 measurements
- Communication with PC via USB
- Site-proof case for difficult environments

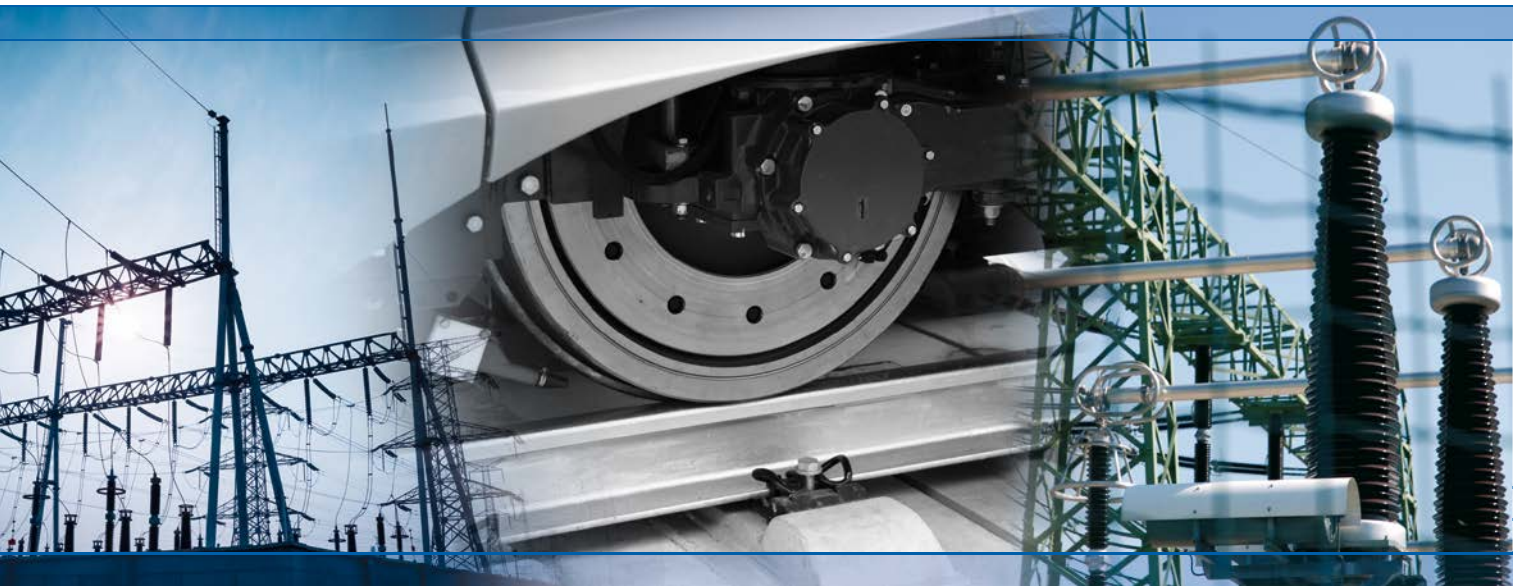

DataView®



**USB**  
UNIVERSAL SERIAL BUS

*Measure up*



# CA 6292: 200 A DIGITAL MICRO-OHMMETER

## Ergonomics


The CA 6292 micro-ohmmeter is a portable measuring instrument supplied in a rugged, waterproof site case. Its clearly-identified connection terminals limit the risk of errors and allow quick connection of the measurement leads.

The measurement results are displayed instantaneously on the backlit LCD screen for easy reading. The CA 6292 can be configured directly using the rotary knob on the instrument or via a PC by means of the USB link.

## Safety & reliability

### Safety first!

The CA 6292 allows measurement in total safety, for both people and equipment. In order to eliminate any risks due to inductive phenomena, the BSG method maintains earthing on both sides of the object measured.

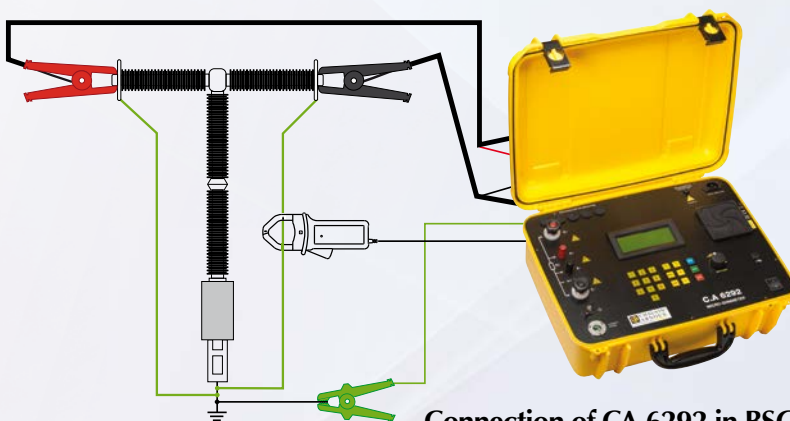

Connection of CA 6292 in BSG measurement mode  
Use of the optional MR 6292 clamp.



Air holes  
for ventilation

4 connection  
terminals

Earth/ground  
terminal

Connector for  
current clamp  
(option) for BSG  
measurement

Alphanumeric  
keypad  
Input of measurement or  
instrument configurations

## DataView® SOFTWARE

The **DataView®** data processing software platform can be used to:

- ✓ Configure instruments connected to a PC or via Bluetooth
- ✓ Recover the measurement data recorded in the instrument
- ✓ Back up measurement files
- ✓ Open saved files
- ✓ Process the data and create reports
- ✓ Export the results into an Excel spreadsheet
- ✓ Export the results in .pdf format
- ✓ Manage database

Test current

Results

Elapsed time/  
test duration

Current flowing  
to earth (BSG)

Date & Time

```

R= 100µΩ
It=142A    Ig=8.0A
DURATION: 015/060s
02/10/13  10:25 AM
  
```



Backlit LCD screen,  
4 lines of 20 characters

Mains power socket  
for connecting the power  
supply cable



Fan

USB

On/Off  
button

Rotary switch

3 function keys

Mode for selecting the type of  
measurement (classic or BSG),  
Start/Stop for starting and  
stopping the test

- navigation in the menus  
- adjustment of test current

## Reliable measurements

The four-wire measurement method, based on Kelvin's principle, makes it possible to eliminate the errors due to the test-lead resistances and the contact resistances. This means the **CA 6292** offers excellent measurement accuracy for low resistance values, thanks to its 0.1 µΩ resolution and its accuracy of approximately 1% for measurement. The test current can be adjusted up to 200 A, as required. The **CA 6292** can also record up to 8,000 measurement results.


## Applications

The CA 6292 is ideal for a wide range of sectors, including:

- ✓ electricity distribution,
- ✓ maintenance and repair firms
- ✓ railways,
- ✓ metallurgy,
- ✓ electrical equipment manufacturers (cut-off systems, circuit breakers, etc.).

It can be used for multiple applications:

- ✓ Contact resistance testing on MV/HV cells
- ✓ Verification of the quality of the contacts on the circuit breakers, switches, relays, etc.
- ✓ Resistance testing on busbars, cables, etc.
- ✓ Continuity testing on rails, axles and welds
- ✓ Checking of surface condition and bonding/metallization
- ✓ Testing of cut-off devices

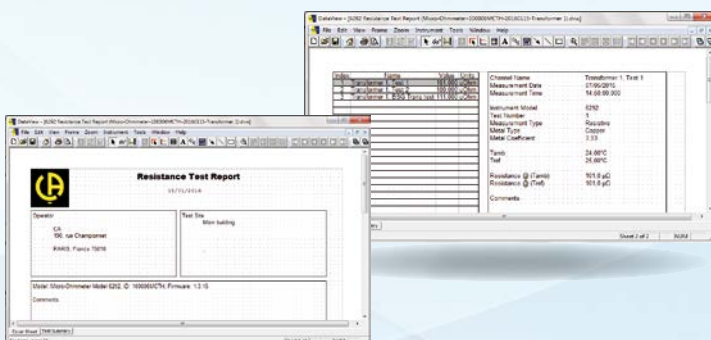



# CA 6292: 200 A DIGITAL MICRO-OHMMETER

|                         |  |  |                                       |
|-------------------------|--|--|---------------------------------------|
| Test current            | Programmable from approx. 20 A to 200 A  |  |                                       |
| Resistance              | 0.1 $\mu\Omega$ to 2 m $\Omega$  | 2 to 200 m $\Omega$                          | 200 m $\Omega$ to 1 $\Omega$          |
| Resolution              | 0.1 $\mu\Omega$ (200 A max)  | 10 $\mu\Omega$ (25 A max to 200 m $\Omega$ ) | 1 m $\Omega$ (5 A max to 1 $\Omega$ ) |
| Accuracy                | $\pm$ 1% from 50 $\mu\Omega$ to 1 $\Omega$   |  |                                       |
| Output voltage          | 110 VAC: 4.2 V @ 200 A<br>220 VAC: 8.6 V @ 200 A   |  |                                       |
| Maximum load resistance | 110 VAC: 20 m $\Omega$ @ 200 A<br>220 VAC: 42 m $\Omega$ @ 200 A                                       |  |                                       |
| Measurement method      | 4 Kelvin-type connection terminals   |  |                                       |
| Test mode               | Normal or BSG (Both Sides Grounded)  |  |                                       |
| Test duration           | Adjustable from 5 to 120s @200 A / unlimited up to 100 A   |  |                                       |
| Data storage            | Up to 8,000 measurement results  |  |                                       |
| Interface               | USB 2.0  |  |                                       |
| Software                | DataView®  |  |                                       |
| Power supply            | 100 to 240 VAC – 50/60 Hz  |  |                                       |
| Dimensions              | 502 x 394 x 190 mm   |  |                                       |
| Weight                  | 13 kg approx. (excluding accessories)  |  |                                       |
| Operating temperature   | 0 °C to +55 °C   |  |                                       |
| Storage temperature     | -10 °C to +70 °C   |  |                                       |
| Humidity                | 95% RH   |  |                                       |
| Protection              | Protected against voltage surges, short-circuits, overheating and overvoltages on the output terminals |  |                                       |
| Ingress protection      | IP54   |  |                                       |
| Electrical safety       | IEC 61010-1  |  |                                       |

## CURRENT MEASUREMENT WITH THE OPTIONAL MR6292 CLAMP (BSG MODE)

|   |                            |
|---|----------------------------|
| Measurement range                       | 1.0 - 50.0 ADC             |
| Resolution                              | 0.1 mA                     |
| Intrinsic uncertainty                   | $\pm$ (1,5 % + 2 Digit)    |
| Output signal                           | 10 mV / ADC                |
| Load impedance                          | > 100 k $\Omega$ // 100 pF |
| Influence of conductor position in jaws | 0.50 %                     |

## References

CA 6292 200 A micro-ohmmeter ..... P01143300

### Accessories

1 set of 2 Kelvin leads 6 m long (red / black)  
with adjustable-clamp connections..... P01295486  
1 set of 2 Kelvin leads 15 m long (red / black)  
with adjustable-clamp connections..... P01295487  
1 set of 2 Kelvin leads 15 m long (red / black)  
with 200 A Kelvin clamp ..... P01295495  
1 MR 6292 current clamp for CA 6292 ..... P01120470

### Replacement parts

1 set of 2 Kelvin leads 6 m long (red / black)  
with 200 A Kelvin clamp ..... P01295494  
1 green earth/ground lead with crocodile clip ..... P01295488  
1 set of 5 fuses T 15 A 250 V 5 x 20 mm ..... P01297101  
1 USB-A USB-B cable 1.5 m long ..... P01295293

## State at delivery

Delivered in a site case with an additional case containing:  
1 mains power cable, 1 set of 2 Kelvin leads 6 m long (red / black)  
with 200 A Kelvin clamp, 1 green earth/ground lead 3 m long  
terminated by a crocodile clip, 1 USB  
A/B cable 1.5 m long, 1 user manual  
on CD-ROM (1 file per language),  
1 multilingual Quick Start Guide,  
1 CD-ROM containing the MOT and  
DataView® software, 1 multilingual  
safety datasheet.



**FRANCE**  
**Chauvin Arnoux**  
190, rue Championnet  
75876 PARIS Cedex 18  
Tél : +33 1 44 85 44 85  
Fax : +33 1 46 27 73 89  
info@chauvin-arnoux.fr  
www.chauvin-arnoux.fr

**UNITED KINGDOM**  
**Chauvin Arnoux Ltd**  
Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk  
Dewsbury, West Yorkshire - WF12 7TH  
Tel: +44 1924 460 494  
Tel: +44 1924 455 328  
info@chauvin-arnoux.co.uk  
www.chauvin-arnoux.com

**Middle East**  
**Chauvin Arnoux Middle East**  
P.O. BOX 60-154  
1241 2020 JAL EL DIB - LEBANON  
Tel: +961 1 890 425  
Fax: +961 1 890 424  
camie@chauvin-arnoux.com  
www.chauvin-arnoux.com

 **CHAUVIN  
ARNOUX**